


Fixed length positioning lanyards constructed from 10.5 mm polyamide semi-static rope. Rope lanyards with no shock absorber are certified for positioning use or as anchors only.

The protective system for rope loops and stitching is incredibly compact and robust; includes anti-rotation rubber for the carabiner. Strength 22 kN.

DOUBLE + 0981 + 2x2017 155 cm

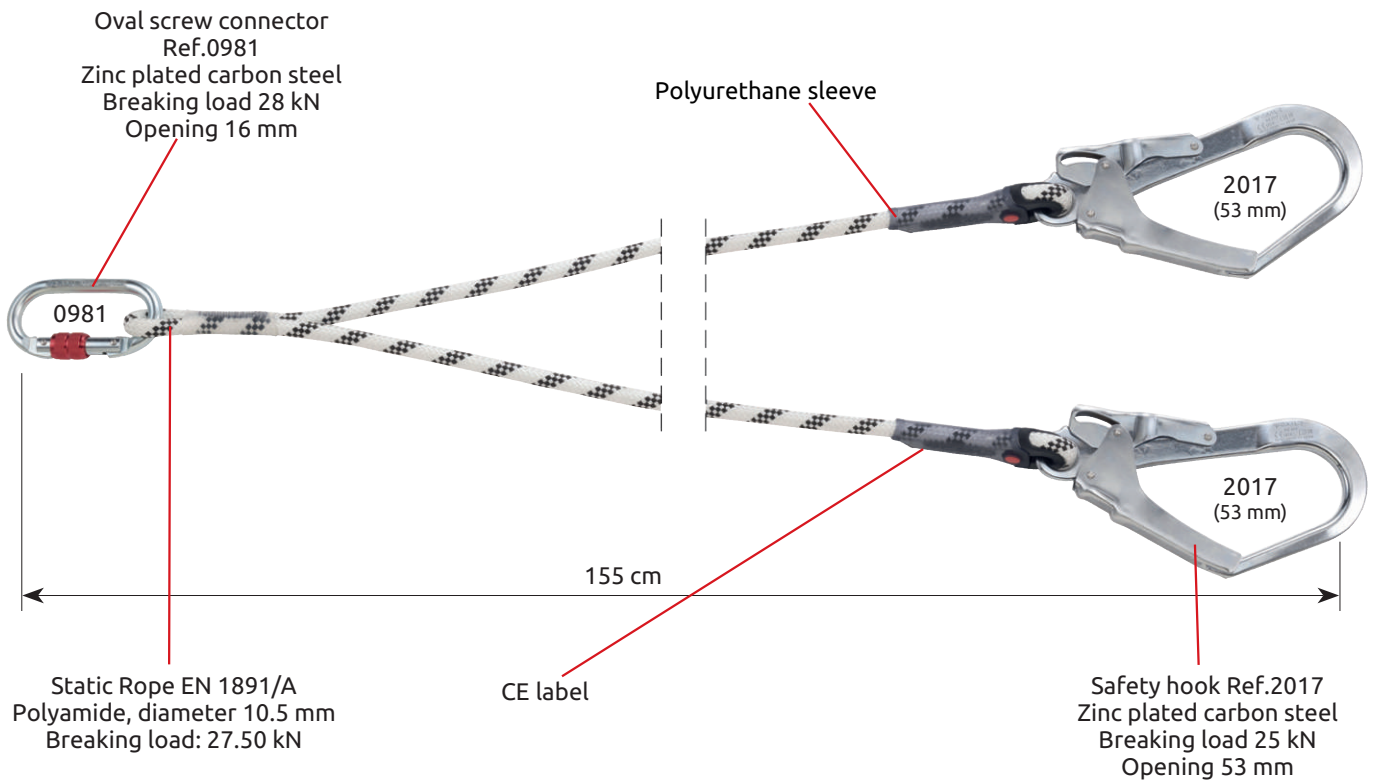

Ref.	Product name	Weight		CE	
		g	oz	EN 354	EN 795/B
203008	ROPE LANYARD DOUBLE + 0981 + 2x2017 155 cm	1365	48.2	•	