


Fixed length positioning lanyards constructed from 10.5 mm polyamide semi-static rope. Rope lanyards with no shock absorber are certified for positioning use or as anchors only.

The protective system for rope loops and stitching is incredibly compact and robust; includes anti-rotation rubber for the carabiner. Strength 22 kN.

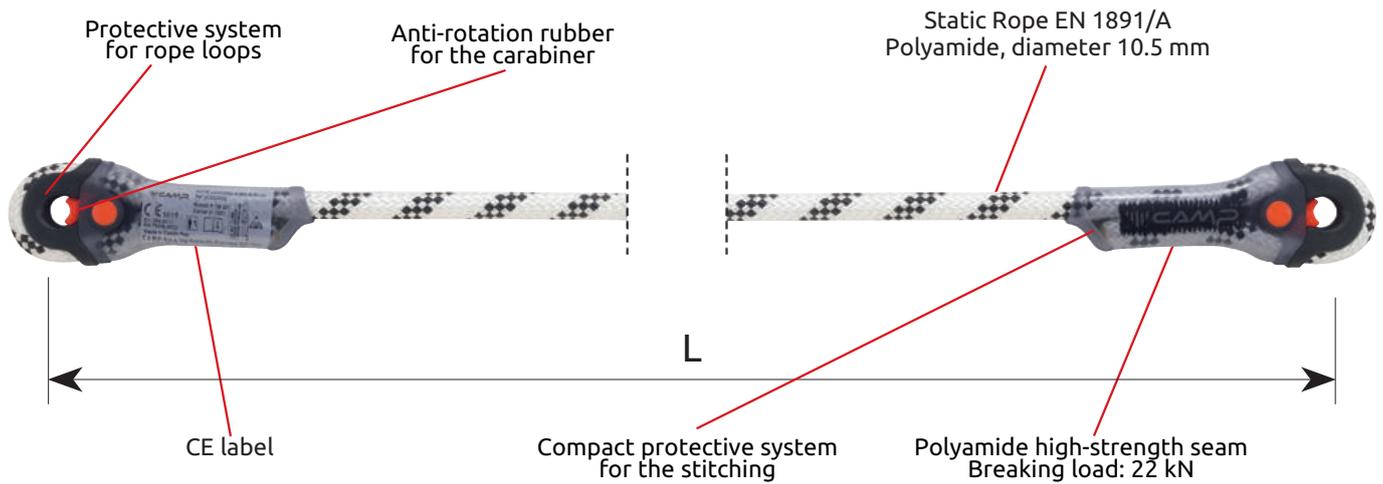

Ref.	Product name	Weight		CE	
		g	oz	EN 354	EN 795/B
2030050C	ROPE LANYARD SINGLE 50 cm	95	3.4	•	•
2030100C	ROPE LANYARD SINGLE 100 cm	130	4.6	•	•
2030150C	ROPE LANYARD SINGLE 150 cm	165	5.8	•	•
2030200C	ROPE LANYARD SINGLE 200 cm	200	7.1	•	•