


Horizontal temporary lifeline constructed from strong and durable polyester webbing. Certified for use with a maximum of two people. Equipped with steel tensioning ratchet, two polyamide anchor loops (ref.104065), and two locking steel connectors (ref.0981).

**Art.1095** 18 meters

**Art.109501** 30 meters

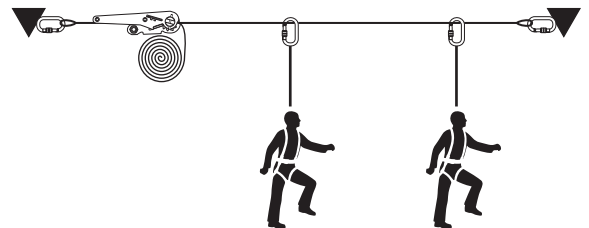

Ref.	Product name	Weight		CE	STANDARD		EN
		g	oz		EN 795/C	TS 16415	
1095	TEMPORARY LIFELINE 5-18 m	3000	105.9	•	•	•	•
109501	TEMPORARY LIFELINE 5-30 m	3500	123.5	•	•	•	•

A	REF.						
			L min	L max	L max	L <sub>1</sub> min	L <sub>1</sub> max
1095 Temporary Lifeline 18 m	EN 795 B+C		5 m	18 m	18 m	5 m	18 m
	EN 795 C		12 m	18 m	18 m	5 m	18 m
109501 Temporary Lifeline 30 m	EN 795 B+C		5 m	18 m	30 m	5 m	18 m
	EN 795 C		12 m	18 m	30 m	5 m	18 m

B	BENDING (f)	f		F <sub>max</sub>
		EN 795/B+C	EN 795/C	
MAX FORCE ON THE ANCHOR (F <sub>max</sub> )				

